Elara™ 7242 | SALON™ SPA

If you enjoy soaking in a warm, soothing tub surrounded by gently moving water, or if you prefer an invigorating foot and back massage, the Elara™ tub is right for you.

FEATURES:

- Multi-speed motor
- 4 fully adjustable TheraPro® jets
- 8 AccuPro™ back and foot jets
- 900 watt variable speed heated air blower
- Bottom air channels for maximum massage
- Chromatherapy™ lighting system capable of 256 colors
- All-in-one electronic control panel
- Drain-assist purge system
- Flexible drop-in or undermount installation options
- RapidHeat™ inline heater
- Low profile deck
- PrO$_3$™ Cleansing System

Elara™ 7242
SALON™ SPA

MODEL NUMBER:
DX50 (Right-hand)

EXTERIOR DIMENSIONS:
72" long x 42" wide x 26" high

 # OF JETS/TYPE OF JETS:
4 TheraPro™
6 AccuPro™ Back Jets
2 AccuPro™ Foot Jets

OPERATING GALLONS:
95-105 gallons

Elara™ 7242
SALON™ SPA

DX50	Elara™ 7242 Salon™ Spa with Chromatherapy — Right Hand

- Right Hand Drain Location
- Accessories / Hardware:
  - TheraPro™ Jet Rings Kit: #D095
  - AccuPro™ 2 Jet Rings Kit: # J869*
  - Sch 40, Rotary Drain Kit: #DA34
- Trim Kit Finishes Available:
  - (827) – Chrome
  - (898) – Brushed Chrome
  - (815) – Satin Nickel
  - (829) – Bright Brass
  - (805) – Platinum
  - (826) – Brushed Nickel
  - (845) – Oil Rubbed Bronze

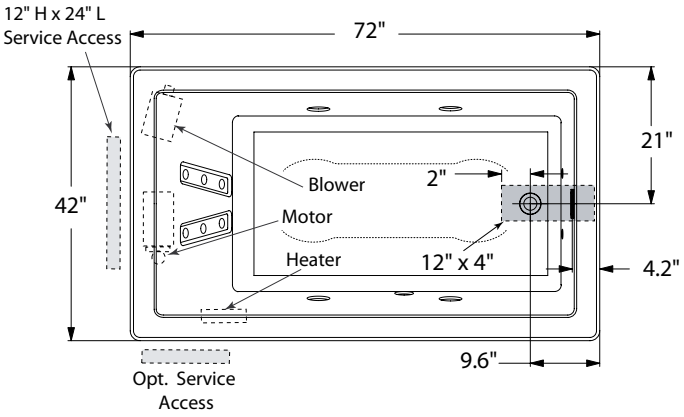

Product Shown: Elara 7242 Salon™ Spa, Right Hand Shown Model: DX50

** Measurements inside unit represent cutout in floor to allow for drain/overflow.*

Minimum Service Access dimensions given.

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS
72" L x 42" W x 26" H
(1829 mm) L x (1067 mm) W x (660 mm) H

DRAIN/OVERFLOW
A: 18-1/2" (470 mm) B: 9.6" (244 mm)

CUTOUT
70" (1778 mm) x 40" (1016 mm) & undermount template BZ50000

TOTAL WEIGHT
1060 lb. (481 kg) / 51 lb/ft^2 (247 kg/m^2)

OPERATING GALLONAGE
100 U.S. Gal. (379 Liters)
Min. 95 U.S. Gal. (360 Liters)
Max. 105 U.S. Gal. (398 Liters)

PRODUCT WEIGHT
178 lb. (81 kg)

SKIRT MOUNTING
Not Available

ELECTRICAL SPECIFICATIONS
Requires a dedicated GFCI protected separate circuit.
Blower: 120VAC, 20AMP, 60 Hz.
Motor/Pump and RapidHeat™: 240VAC, 20AMP, 60 Hz.

HEATER (STANDARD)
Requires a dedicated GFCI protected separate circuit.
RapidHeat™: P/N BN60000



SIDE VIEW

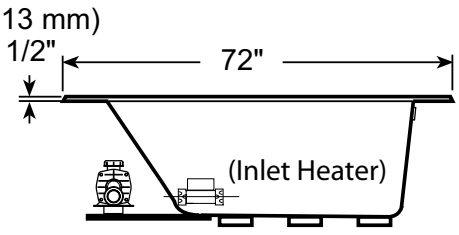

END VIEW



DRAIN/OVERFLOW